No.	Name	Note	No.	Name	Note
1	Angle valve	1/4"Flare	17	Refrigerant service valve	1/4"Flare
2	Discharge flange	3"	18	Connector	1/4"Flare
3	Solenoid valve	50%(NC)	19	Liquid injection connector	5/8"Flare
4	Solenoid valve	75%(NC)	20	Suction flange	5"
5	Solenoid valve	25%(NC)	21	Cable box	Standard
6	Liquid(oil or refrigerant) injection connector	3/8"Flare	22	Service flange	
7	Capillary		23	Oil drain valve	
8	Check valve	3"	24	Oil level switch	
9	Oil flow sight glass		25	Discharge temp. sensor	110°C
10	Oil heater	150W/300W	26	Safety Valve	1"NPT,option
11	Oil filter cartridge		27	Economizer port	1 1/8", solder
12	Oil pressure differential switch	Connector, option	28	Oil level sight glass	
13	Oil cooler connector(out)	3/4"Flare, option	29	Oil temp. sensor	option
14	Stop pin	option	30	Over flow port	option
15	Oil cooler connector(in)	3/4"Flare, option	31	Solenoid valve	Stepless(NC or NO), option
16	Angle valve	1/4"Flare			

*All stop valves are optional.

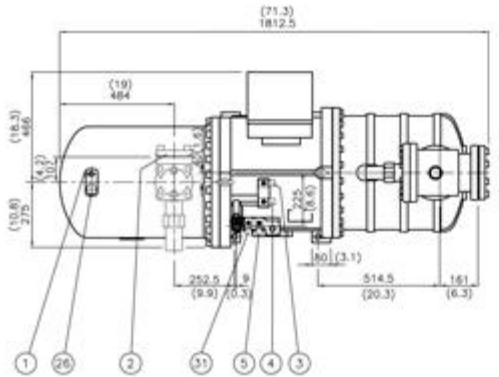

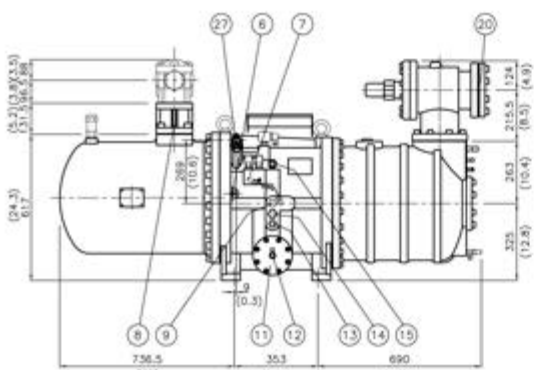

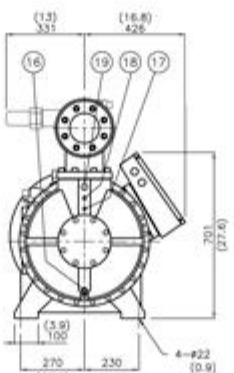

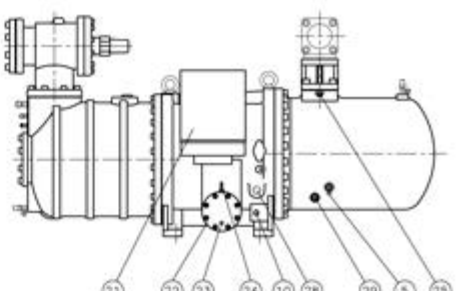

Item	Date	Modification
3		
2		
1	2009.03.26	Riss in motor casing have seen removed

Model	RC2-610B
Name	Compressor outline
HANBELL	Ver. 03

UNIT:
SI: mm Imperial: (in)