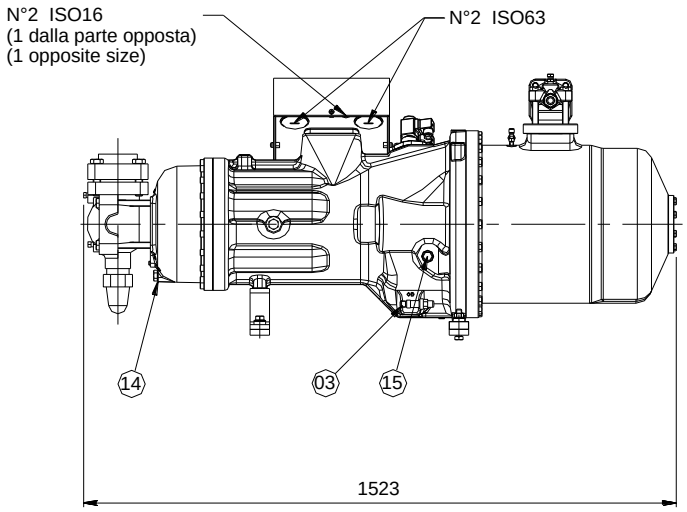


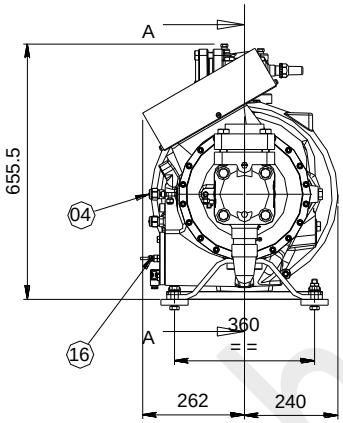


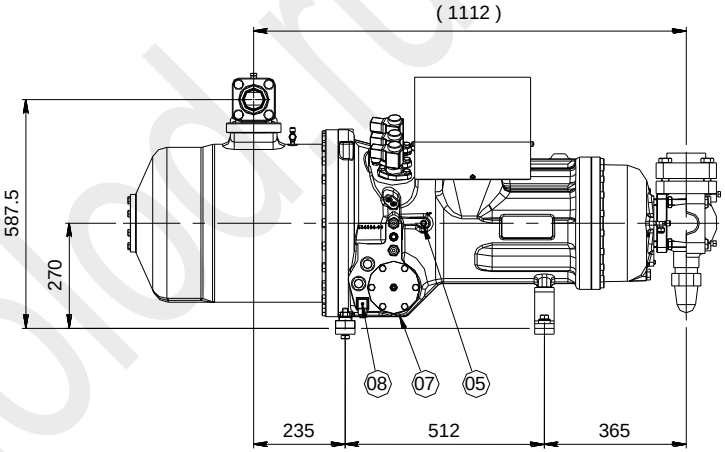


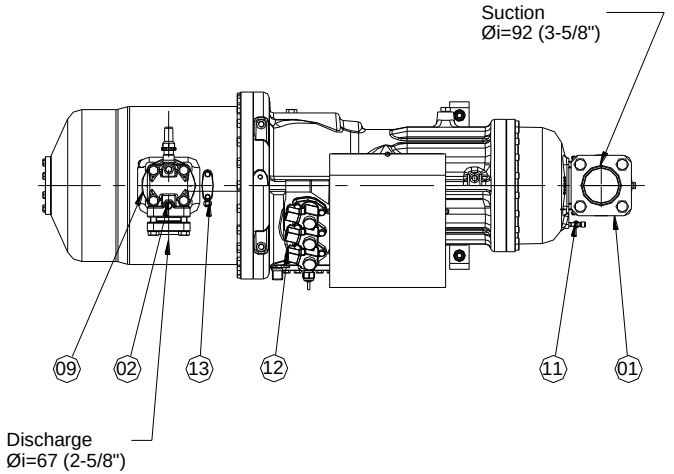


LEGENDA

1 - Rubinetto aspirazione
2 - Rubinetto scarico
3 - Rubinetto carico/scarico olio 3/8" SAE-FLARE
4 - Connessione raffreddamento olio
5 - Pressione olio 1/4" SAE-FLARE
6 - Vetro spia olio
7 - Filtro olio
8 - Riscaldatore olio
9 - Valvola di non ritorno
10 - Scatola morsettiera
11 - Bassa pressione 1/4" SAE-FLARE
12 - Solenoidi parzializzazione
13 - Alta pressione 1/4" SAE-FLARE
14 - Scarico olio su coperchio
15 - Raccordo iniezione liquido Ø16/Rubinetto eco Ø22 (opzionali)
16 - Sensore temperatura scarico 1/8"NPT (opzionale)

KEY

1 - Suction shut-off valve
2 - Discharge shut-off valve
3 - Oil fill/drain valve 3/8" SAE-FLARE
4 - Oil cooler connections
5 - Oil pressure 1/4" SAE-FLARE
6 - Oil sight glass
7 - Oil filter
8 - Crankase heater
9 - Non return valve
10 - Electrical box
11 - Low pressure gas 1/4" SAE-FLARE
12 - Solenoid valves for part-load operation.
13 - High pressure gas 1/4" SAE-FLARE
14 - Oil drain motor housing
15 - Liquid injection connection Ø16/ Economizer shut-off valve Ø22 (optionals)
16 - Discharge temperature sensor 1/8"NPT (optional)

www.msk-nord.ru

# Screw compressor 134-S-081

RefComp